


For the first time, the ultra-lightweight benefits of carbon fibre can be used in specialist A & H class fire doors, whilst still complying with and exceeding industry fire standards.

Furnace Temp °C*	Time (mins)	Max B Face Temp °C
960	60	164
960	120	162

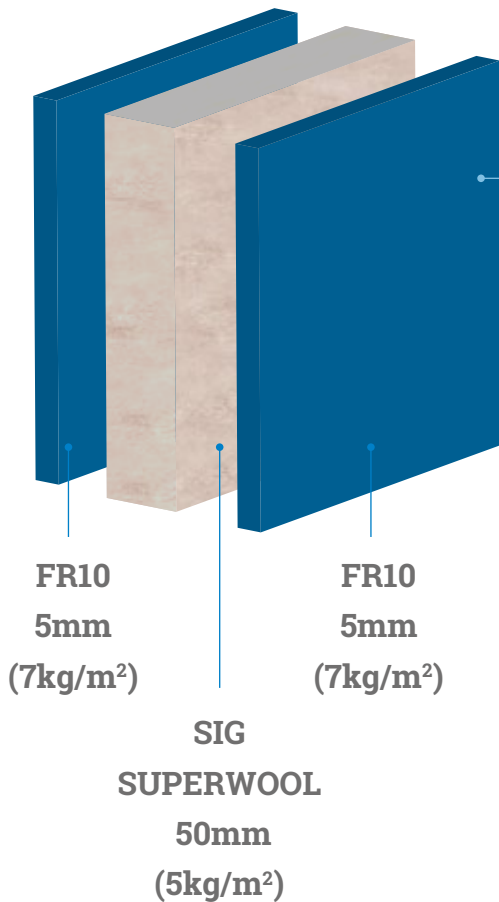

TOTAL THICKNESS – 60mm
TOTAL WEIGHT / m² – 20kg
 (Excluding frame & fittings)

Performance Benefits

- Up to 70% weight saving over existing metallic doors
- Corrosion, weather, water and chemical proof
- High quality surface finish in choice of colours
- Easy to machine, fasten and bond
- Available on 7 day lead times

*(Note: Hydrocarbon fire test carried out by Warrington Fire)

For more information contact:

Diego Jezler – Business Development Director

E: diego.jezler@cfpcomposites.com | M: +44 (0) 7938 027 733